

Lead2passExam

> Contact Us Login / Register Search...

Lead2passExam

HOME

ALL VENDORS

★ GUARANTEE

? FAQ

TESTIMONIALS

CART (1)

Pass Your Next Certification Exam Fast!

Everything you need to prepare, learn & pass your certification exam easily.
365 days free updates. First attempt guaranteed success.



Select a vendor...

Select an test...

Your email address

Free Download Demo

Top Certifications

- ▶ IBM Cognos ▶ Linux Essentials ▶ Magento Certified Developer Plus ▶ BCS Certification
- ▶ Citrix NetScaler ▶ Nokia Networks Certification ▶ Solutions Expert
- ▶ VCAP6-DCV Deployment ▶ Oracle Sales Cloud 2016 Certified ▶ Oracle Service Cloud
- ▶ CCP-N ▶ IBM Certified Mobile System Administrator ▶ Windows 7 ▶ APC Certification
- ▶ HPE Sales Certified

Top Vendors

- ▶ Logical Operations ▶ TIA ▶ Pegasystems ▶ IISFA ▶ Mile2 ▶ 3COM ▶ Altiris ▶ IIA
- ▶ AccessData ▶ Avaya ▶ BACB ▶ Nokia ▶ RAPS ▶ McAfee ▶ Professional Tests
- ▶ Mile2-Security ▶ CIPS ▶ Legato ▶ ASQ ▶ QlikView ▶ NSCA ▶ PSAT ▶ HRCI
- ▶ WorldatWork ▶ Guidance Software

What Client's Say

“ Passed the exam yesterday, but 10 questions new not came from this dump. every other questions are same. Totally valid. ”



Roy
★★★★★

“ This is still valid. Passed today with 80%. looked like 3-4 new questions. Many thanks! Good braindumps ”



Vic
★★★★★

<http://www.lead2passexam.com/>

Available Exam Cram and Valid Dumps - Lead2Pass Exam

Exam : **HPE0-S50**

Title : Integrating HPE Synergy
Solutions

Vendor : HP

Version : DEMO

NO.1 A customer has HPE SY 480 modules with two CPUs and 384GB (16GB DIMMS) of memory. The customer needs to double the CPU and memory capacity for java application server. What should a Synergy integrator do to meet the customer needs?

- A. Upgrade the HPE Synergy SY to two additional CPUs and replicate 16 Gb dimms with 32Gb.
- B. Install an HPE Synergy SY 620 compute module and reassign the server profile.
- C. Install an HPE Synergy SY 680 compute module and reassign the server profile .
- D. Upgrade the HPE Synergy SY 480 to two additional CPUs and replace 16GB dimms with 64Gb.

Answer: C

NO.2 A customer reports that performance is not adequate for an application using a hybrid HPE StoreVirtual VSA.

How can a Synergy integrator improve performance for this application?

- A. Migrate the volume from Network RAID10 to Network RAID50.
- B. Enable adaptive optimization on the volume for the application.
- C. Change the volume for the application on the VSA to thick provisioned.
- D. Change the volume for the application on the VSA to thin provisioned.

Answer: C

NO.3 A synergy integration creating a network that must be connected from the Synergy Connect SE 40Gb FB module to an Ethernet switch carrying 500 VLANs for the hypervisor cluster.

Which network should the synergy integrator select during network creation?

- A. Ethernet Tunneled
- B. Ethernet Untagged
- C. Ethernet Channel
- D. Ethernet Tagged

Answer: A

NO.4 A customer needs four Synergy compute nodes to provide virtual machine access to six VLANs over a single link aggregation group.


How can the Synergy integrator configure the environment to meet the customer needs?

- A. Create a six untagged networks and assign them to one or more of the interface in the server template.
- B. Create a single tunnel network and assign it to one or more interfaces in the server profile template.
- C. Create six tunnel networks, add them to a network set, and assign that network set to one or more interface in the server profile template.
- D. Create six untagged networks and assign them with an IP address pool, and assign them to once or more interfaces in the server profile template.



Answer: B

NO.5 A customer needs to incorporate the HPE Synergy D340 Compostable Storage Module into its environment:

Click the adapter associated with the fabric in which the customer should install the p542 controller.

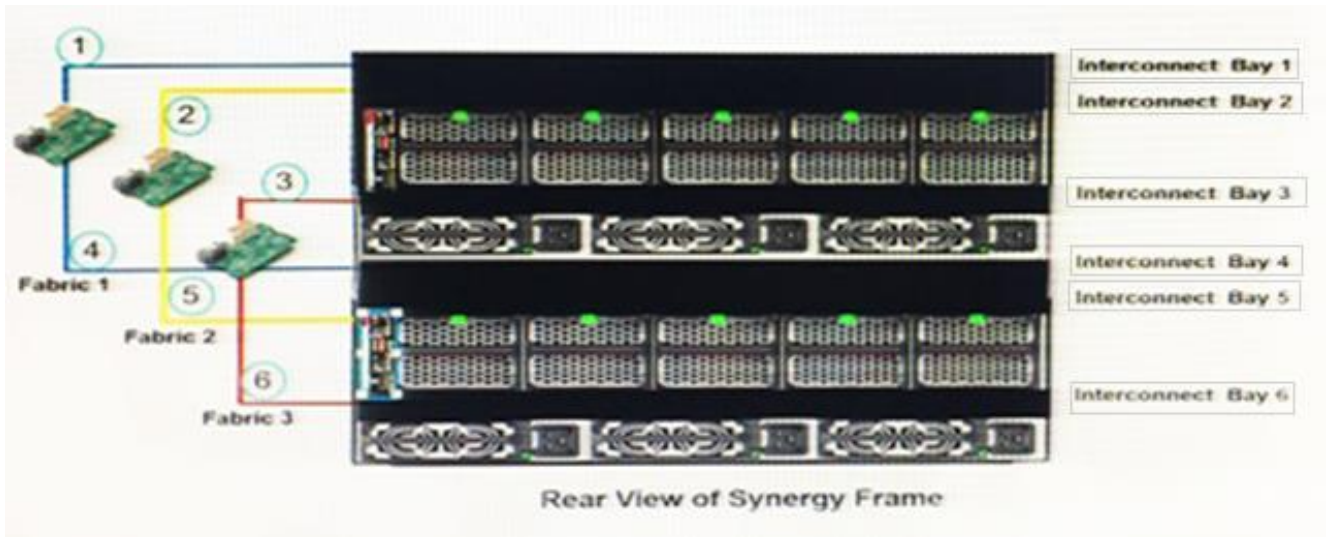

Answer:

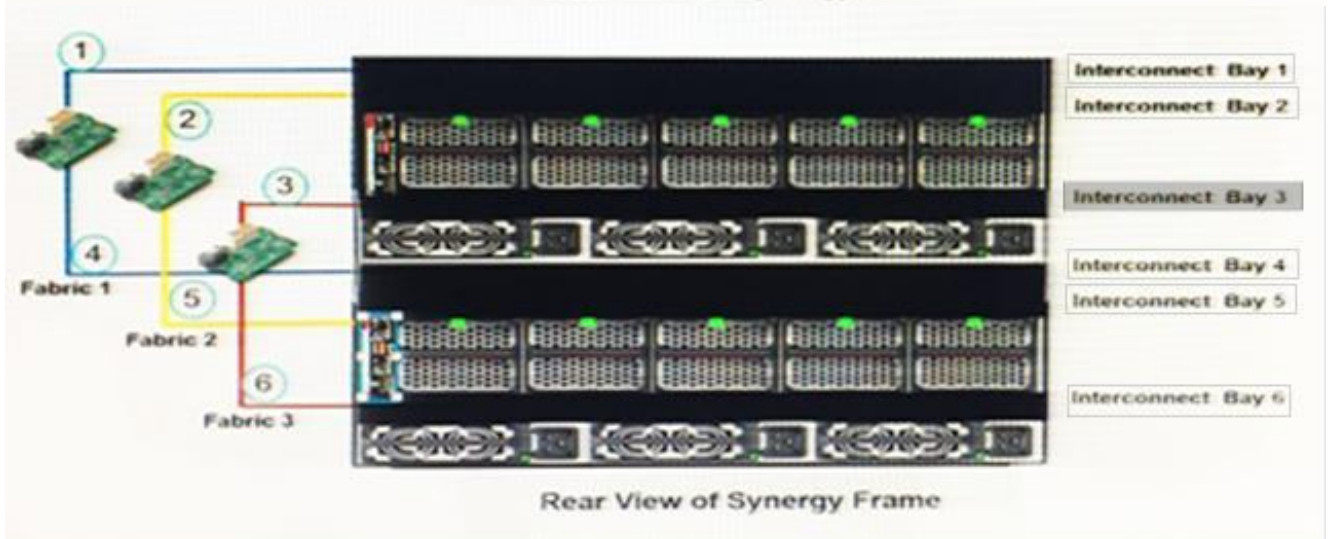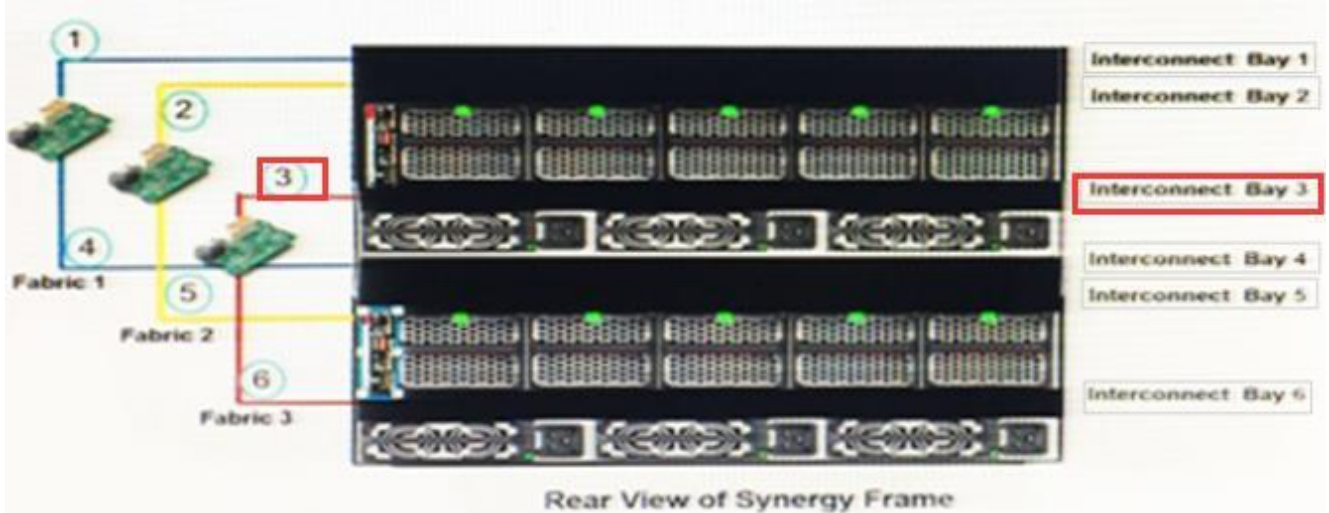

NO.6 When should IP address be assigned using an IPv6 address pool in the Composer? (Select two.)

- A. when configuration Composer appliance
- B. when configuration interconnects modules
- C. when booting to an iSCSI initiator with image Streamer

- D. when configuring management NICs in an operating system
- E. when PXE booting from the deployment server

Answer: C,E